

ECOWATER
S Y S T E M S[®]



Your Water. Perfected.

Let us

Perfect

your water and

Maximize

your peace of mind.

ETF2300

ECOWATER SERIES – WATER FILTRATION SYSTEMS

Proven System for Removing Iron and Treating Problem Water

1 Electronic Timer Controls with HydroLinkPlus[®] Wi-Fi and Smartphone App Monitoring

Wi-Fi enabled technology sends continuous and excessive water use, system error and service reminder alerts.

Water Meter

Allowing for chemical feed dosing, flow switch operation and water use information.

2 Full One-Inch Riser

One-inch diameter for increased flow rates, which ensures that household demand is adequately met.

3 Multi-Wrap Fiberglass Reinforced Media Tank

Durable fiberglass-wrapped tank liner – doesn't deteriorate, rust, or corrode.

4 Self-Cleaning Distributors

Distributors exhibit excellent flow rates and are cleaned automatically by counter-current water pressure.

5 Choose Media for Custom Applications

6 Washed Quartz Underbedding

Washed quartz underbedding aids in dispersion of water throughout the media tank.


7 Bypass Valve (optional)

Brass-free and lead-free bypass valve lets you manually bypass the system.

Fully Ported One-Inch Valve with Easy-Clamp Ring and Patented Disc.

Energy Efficient Power Supply

Simplifies installation, maintenance and reduces electrical hazards.

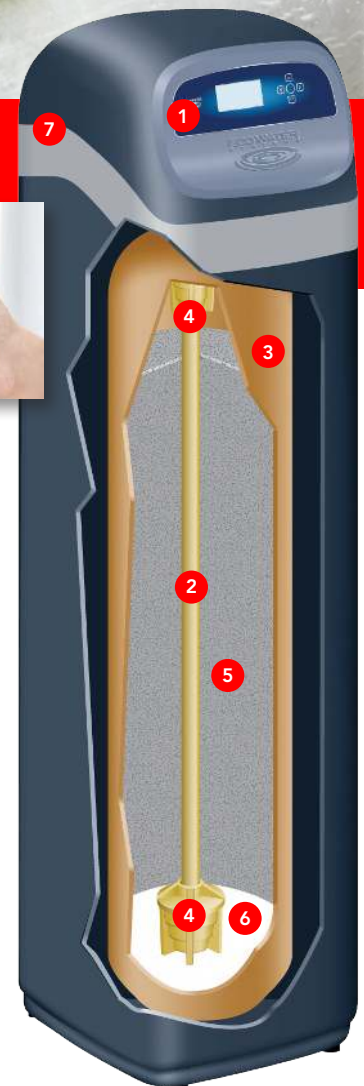


 Designed, Engineered &
Assembled in the U.S.A.

ecowater.com

ETF2300 (PF10 & PF12)

ECOWATER SERIES
WATER FILTRATION SYSTEMS

DIMENSIONS

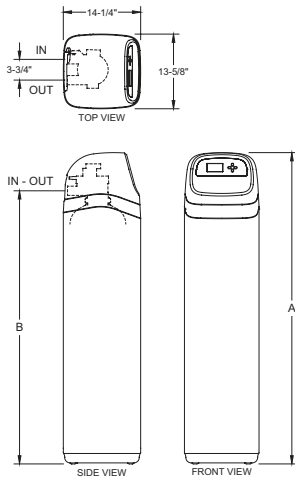

	ETF2300 PF10	ETF2300 PF12
Nominal Resin Tank Size	10" Diam. x 47"	12" Diam. x 54"
A	57"	62 ¹ / ₅ "
B	50"	55 ³ / ₄ "

SPECIFICATIONS

Multi-purpose Filters (3 media choices)

Sediment Removal Service Water Flow Rate (gpm)
Type of Media: Filter Aggregate Contaminant Limits

ETF2300PF10

4 Based on water analysis

ETF2300PF12

4 – 8

Acid Neutralizer Service Water Flow Rate (gpm)
Type of Media: Neutralite Lower pH Limit

8
6.0

8
6.0

Taste and Odor Removal Service Water Flow Rate (gpm)
Type of Media: Activated Carbon Contaminant Limits

8 Based on water analysis

8

Amount Media Recommended (cu. ft.)

1 to 1¹/₄

2

Amount Washed Quartz (lbs.)

17

29

Supply Water Pressure Limits (psi)

20-125

20-125

Supply Water Temperature Limits (°F/ °C)

40-120 / 4-49

40-120 / 4-49

Minimum Inlet Water Flow (gpm) – Required for backwash and fast rinse on media listed above.*

5

7

*Check with media manufacturer for other media requirements.

WARRANTY

- For the lifetime of the original owner, the mineral tank will not rust, corrode, leak, burst, or in any other manner fail to perform its proper function.
- For a period of five years, the valve body will be free of defects in materials and workmanship and will perform its proper function.
- For a period of seven years, the electronic faceplate will be free of defects in materials and workmanship and will perform its normal function.
- For a period of one year, all other parts will be free of defects in materials and workmanship and will perform their normal functions.



MS2

